

**Proven
Performance**

McCloskey INTERNATIONAL **S80**




S80 High Energy Screener

The S80 is the entry point the highly successful McCloskey S-Series 3 way split range. It combines a 4.5'x10' High Energy Screenbox with all the operator oriented features common to the rest of the range.



Options
Tandem axle
wheeled unit



Shredder unit



Wash plant
configuration



Livehead/Vibrating Grid:
6.5' x 9.5' (2.0m x 2.9m)
Single or Double Deck
Livehead



Features & Benefits

Hydraulic Screenbox Linkage System –

Allows greater accessibility for screen change and ensures optimum screen coverage. The S80 screenbox can operate between 27° and 38° for maximum screening efficiency.

High Energy 4.5' x 10' (1.37m x 3.05m) Screenbox –

10mm throw at 950RPM provides the most aggressive screening action in the S80's class.

36" Chevron Main Conveyor –


Prevents rollback of natural round material when screening at higher angles


8 Cubic Yard (6.12 m3) Hopper –

13'-5" (4.08m) loading width allows the use of large front end loaders & excavators.

Large Open Engine Bay –

Allows easy access for service. Powered by 84hp Tier III JCB.

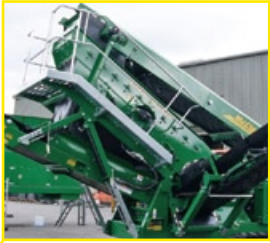

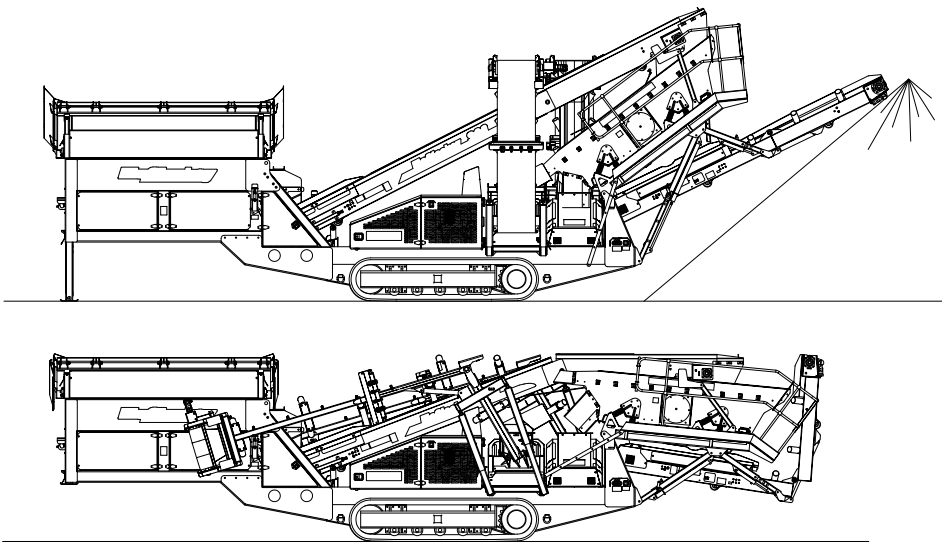

S80 Dimensions and Weight

Length – Transport all models	13.2m (44'-4")
Width – Transport all models	2.5m (8'-4")
Height – Transport tracked	3.2m (10'-6")
Height – Transport wheeled	3.7m (12'-1")
Weight – Tracked	19,250Kgs (42,439lbs)
Weight – Wheeled	18,200Kgs (40,124lbs)

See it in action...

View working videos, customer testimonials and more at
www.mccloskeyinternational.com

McCloskey
 INTERNATIONAL

N.America & S.America
 #1 McCloskey Road, RR#7
 Peterborough, Ontario Canada,
 K9J 6X8
 1-877-876-6635
 T (705) 295-4925
 F (705) 295-4777
sales@mccloskeyinternational.com

UK & International
 47 Moor Road,
 Coalisland,
 Co Tyrone,
 N.Ireland BT71 4QB
 T +44 (0) 2887-740-926
 F +44 (0) 2887-747-242
salesuk@mccloskeyinternational.com

McCloskey International reserves the right to make changes to the information and design of the machines on this brochure without reservation and notification to the users. McCloskey International assumes no liability resulting from errors or omissions in this document.



Standard Features



Durability

JCB 444 84HP Tier III Engine
 David Brown Pumps
 Twopack paint system
 High quality low restriction hydraulic system for lower fuel consumption and lower oil temperatures



Maintenance/User Friendly

Accessible engine bays
 Fixed galvanized walkways
 Radio control tracks
 10 min setup time
 Anti seize coarse thread take-ups
 Easy access for screen changes
 Compact travel dimensions



Authorized dealer.